

**This Page Is Inserted by IFW Operations  
and is not a part of the Official Record**

## **BEST AVAILABLE IMAGES**

**Defective images within this document are accurate representations of the original documents submitted by the applicant.**

**Defects in the images may include (but are not limited to):**

- **BLACK BORDERS**
- **TEXT CUT OFF AT TOP, BOTTOM OR SIDES**
- **FADED TEXT**
- **ILLEGIBLE TEXT**
- **SKEWED/SLANTED IMAGES**
- **COLORED PHOTOS**
- **BLACK OR VERY BLACK AND WHITE DARK PHOTOS**
- **GRAY SCALE DOCUMENTS**

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**



Attorney Docket No.: 2001-1288

PATENT

IN THE U.S. PATENT AND TRADEMARK OFFICE

Applicant: REUMEKORF et al. Conf. No.: 2231  
Appl. No.: 10/658,459 Group: 1754  
Filed: September 10, 2003  
For: METHOD AND APPARATUS FOR RECOVERING A  
PURE SUBSTANCE FROM AN IMPURE SOLUTION  
BY CRYSTALLIZATION

L E T T E R

Assistant Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Date: January 21, 2004

Sir:

Under the provisions of 35 U.S.C. § 119 and 37 C.F.R. § 1.55(a), the applicant(s) hereby claim(s) the right of priority based on the following application(s):

<u>Country</u>	<u>Application No.</u>	<u>Filed</u>
EUROPE	02078711.5	September 10, 2002

A certified copy of the above-noted application(s) is(are) attached hereto.

If necessary, the Commissioner is hereby authorized in this, concurrent, and future replies, to charge payment or credit any overpayment to Deposit Account No. 25-0120 for any additional fee required under 37 C.F.R. §§ 1.16 or 1.17; particularly, extension of time fees.

Respectfully submitted,

YOUNG & THOMPSON

By Benoît Castel

Benoît Castel, #35,041  
745 South 23<sup>rd</sup> Street, Suite 200  
Arlington, Virginia 22202  
(703) 521-2297

BC/psf

Attachment



**THIS PAGE BLANK (USPTO)**



**Eur päisches  
Patentamt**

**Eur pean  
Patent Office**

**Office européen  
des brevets**

**Bescheinigung**

**Certificate**

**Attestation**

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

**Patentanmeldung Nr. Patent application No. Demande de brevet n°**

02078711.5

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

**R C van Dijk**

**THIS PAGE BLANK (USPTO)**



Anmeldung Nr.:  
Application no.: 02078711.5  
Demande no.:

Anmeldetag:  
Date of filing: 10.09.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Niro Process Technology B.V.  
P.O. Box 253  
5201 AG 's-Hertogenbosch  
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Method and apparatus for recovering a pure substance from an impure solution by  
crystallization

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)  
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

B01D9/00

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

**THIS PAGE BLANK (USPTO)**



10.09.2002

**Method and Apparatus For Recovering a Pure Substance From an Impure  
Solution by Crystallization**

5

**Background of the invention**

The invention relates to a two step crystallization process for recovery of a purified solvent from a liquid mixture and to an apparatus for carrying out the method. The invention in particular relates to a process where a) this starting mixture is subjected to a crystallization step where the solvent forms a suspension of solvent crystals and liquid residue and b) where these crystals are separated in wash columns to form pure solvent product and liquid residue that is passed to c) the second step where more solvent crystals are formed and d) these crystals are partially separated to form a solvent enriched product that is combined with the starting mixture in step a) and a liquid residue that is discharged from the process

15

The crystallization process can produce pure product crystals. Eutectic systems offer the possibility to produce pure product from mixtures with a wide range of impurities. The phase diagram, such as shown in Figure 1., illustrates this for a typical chemical eutectic solution. Product B can be produced as pure crystal plus a liquid residue containing B plus impurities all the way down to the eutectic concentration ( $x_e$  as wt% of B in liquid residue). The maximum recovery possible using only crystallization for a particular product is determined by the eutectic concentration  $x_e$ . The equilibrium temperature ( $T_e$ ) of the solution at eutectic concentration is dependent on the physical properties of the specific product. It is important to note that this concentration is generally not attainable using a single step system. The limitations of the wash column in this aspect are further explained in US Patent 5,062,862. The production of an ultra-pure product by this crystallization technology requires the complete separation of the pure product crystal from the impurities remaining in the liquid residue.

25

The large crystal surface area that allows the optimum growth conditions for the production of pure crystals will negatively affect most attempts at separation. The impurities in the remaining liquid will adhere to all surfaces and complete removal of these impurities is necessary to finish the purification. Wash columns are perfectly suited to complete this task. The advantages of wash column use in similar applications

30

are explained in detail in U.S. patent 5,062,862. Wash columns do, however, have certain restrictions with respect to their range of operation. When the requirement for ultra pure product is coupled with the requisite for high recovery rates, single stage crystallization would lead to an excessive concentration and temperature jump over the wash column. This is a major limitation of such a separation unit as also indicated in U.S. patent 5,062,862.

One solution to this problem was presented in the application of multiple stage crystallization as described in U.S. patent 4,787,985. For applications with a low reject concentration (low eutectic point and high recovery requirements) the installation of up to 5 stages is necessary in order to supply the wash column with a good conditioned feed. Technically the multistage crystallization is an attractive solution as it provides crystal growth at the best possible conditions. Also energy-wise it can offer advantages for systems with a low eutectic temperature, since only the last stage has to be operated at the low temperatures typically found at the eutectic whereas the purification stage feeding the wash column would operate at higher temperatures. The major disadvantage of this process is it's high investment cost.

Another idea to overcome the problem of a limited operating window for a packed bed wash column is described in the invention according to U.S. patent 5,062,862. Here the low temperature crystal slurry, after an initial partial separation of the crystals in a first wash column, is then reslurried in molten product and this suspension is then separated in a second wash column. The above stated limitations based on temperature jump over the first wash column is of no concern in this configuration since it is not attempted to provide a complete separation of crystals from the liquid residue in this first wash column; a certain carryover of liquid impurities after the first wash column is accepted because the final purification is performed in a subsequent second wash column.

A disadvantage of this reslurry process is the fact that all crystals are formed at the lowest temperatures and thus low concentrations of the main component as dictated by the recovery requirements. The crystal growth rate strongly decreases and the nucleation rate strongly increases when the concentration of the main component is reduced. Both effects result in the production of small crystals. To produce crystals of at least 100-200  $\mu\text{m}$ , which are suitable for subsequent separation in wash columns, large residence times are necessary. This results in the requirement of large crystallizers

with the corresponding high investment cost. For some applications it is not possible at all to grow crystals to the required size at those low temperatures. Small crystals would also lead to a more difficult solid-liquid separation - even if the required purities can still be achieved, the throughput of a wash column will decrease.

5       The object of the invention is to provide a process for the production of a crystal suspension under certain boundary conditions which process does not have the disadvantages above, or at least in a substantially reduced rate.

10       The present invention relates to a two-step crystallization purification process for the recovery of a high purity end product. As indicated earlier the present crystallization processes are disadvantaged by the high capital cost and relatively complicated equipment. The invention reduces the number and complexity of the required components and therefore reduces the investment costs. It has now been discovered that various chemical mixtures do not require the installation of multiple stages within each section. The type of crystallizer can also be simplified and the  
15       recrystallization vessel is omitted. These findings can significantly reduce the investment and operation costs when compared to the process described in U.S. Pat. 4,787,985.

#### **Summary of the invention**

20       The invention therefore is characterized by a process and processing unit configuration containing two steps with similar apparatus for crystallization and separation in each step. The first step, or purification step, comprises feeding a relatively pure liquid mixture to a scraped surface vessel type crystallizer consisting of a jacketed drum for heat removal and rotating scraper assembly to clear the product crystals from the drum surface that is cooled by circulating refrigerant liquid in the  
25       outer jacket. This type of crystallizer is known in industry and its specifics are not part of the invention. Cooling the feed liquid will cause a portion of the product to form pure product crystals with the remaining part consisting of the liquid residue. The operating temperature of this first step can be chosen such that a final product of the required purity is achieved in the separation section. This separation is advantageously  
30       carried out in a wash column. The separation removes the crystals formed in the crystallizer from the liquid residue. All remaining liquid residue should be removed from the crystal mass and the crystal mass is then melted and discharged as liquid product. The remaining liquid residue still contains valuable product. This liquid

residue is then fed to a second step, or recovery step that is preferably smaller but comprises an essentially equal configuration as the first step. The recovery step crystallizer again cools the liquid residue so that product crystals are formed. The slurry consisting of pure product crystals and liquid residue is then advantageously separated in a wash column. The operating temperature of the recovery step can be significantly lower than that found in the purification step. The limitation based on the temperature difference over a wash column as indicated in US Patent 5,062,862 is of no concern in this application since it is not desired to provide a complete separation of crystals and liquid residue in this separation section of the recovery step. The reason is based in that it was found that even a partial separation of the crystals is sufficient to remove a significant portion of the liquid residue required to maintain stable operation of the thickening unit. This will become apparent in the examples. The pure crystals and the remaining liquid residue are then transported to the purification stage. The liquid residue removed from the slurry, now sufficiently depleted in product, can be discharged from the system.

The operating temperature of the recovery step can be significantly lower than that found in the purification step and depends on the recovery requirements for a specific application. At a given crystallization rate the temperature of the recovery step can be directly adjusted by the amount of discharged residue. Against that the final operating temperature of the purity step cannot be controlled directly; it depends on the amount of crystals produced in this step relative to the amount produced in the recovery stage and on the thickening efficiency in the recovery stage. The higher the concentration of pure crystals being recycled back to the purity stage, the less impurities are fed to this stage and the higher the final resulting temperature in this stage. If high concentration differences have to be overcome between the liquid residue from the recovery stage and the pure product, thickening rates of 85% until 95% are required to limit the temperature jump over the purity wash column to allowable values. The maximum allowable temperature jump depends on the specific application and is usually in the range between 10 and 20 K.

The usually high recovery demands would require a crystallization system to run at or close to the eutectic composition. With the present invention only the recovery crystallizer has to run at the low concentrations, whereas the majority of crystals can be grown at more favorable conditions at higher concentrations.

The process of the invention is suitable for the purification of organic materials such as p-Xylene, m-Xylene, p-Dichlorobenzene, p-Nitrochlorobenzene, Acrylic acid, acetic acid, naphthalene, TDI, MDI, Caprolactam, MCAA, phenol, bisphenol A, lactic acid and the like and is also suitable for concentration by crystallization e.g. liquid foods, waste waters and other aqueous solutions.

The wash columns described in US Patents 3,872,009 and 4,481,169 are used advantageously in this application but are not required to obtain at least some of the benefits of the process. The advantages of wash columns in similar applications are explained in U.S. Patent 5,062,862 and wash column use is therefore recommended.

It was found that this wash column was especially well suited for the crystal separation in the recovery section. Due to the small crystal size (0.025-0.100 mm) generally produced in these low purity conditions centrifuges and the like generally will not provide the same separation efficiency for this type of slurry stream.

#### **Brief description of the drawings**

The invention will be explained in detail with reference to the accompanying drawings. In the drawings:

Fig. 1 shows a phase diagram of a mixture of substances A and B,k

Fig. 2 shows a first embodiment of a crystallization apparatus according to the present invention, and

Fig 3 shows an embodiment of the crystallization apparatus of Fig. 1.

#### **Detailed description of the invention**

Figure 1 is a phase diagram, giving temperature versus concentration of a mixture of substances A and B. At the equilibrium temperature,  $T_{eq}$ , pure substance B is in equilibrium in a liquid mixture with  $X_{eq}$  weight percent of B. The meta stable region  $T_{max}$  is the temperature range below the equilibrium temperature in which no nucleation of crystals occurs.

The invention is now described on the basis of the Figure 2 wherein this figure shows a schematic of the process consisting of essentially identical sections containing a crystallizer and wash column (1c+1s and 2c+2s). The basic operation of the components is not included since this type of crystallizer is generally known in industry and the specific wash column configuration and operation are described adequately in US Patents 3,872,009, 4,787,985 and 5,062,862. There are notable exceptions to this operation that will be included in the following discussion.

The feed stream 1 enters the purification stage crystallizer 1c where it is cooled and part of the product is crystallized forming a slurry stream of pure crystals and the remaining liquid residue. Alternatively, the feed stream 1 can be fed directly into the slurry stream prior to input in the wash column. This will require the addition of a filtration unit within the first crystallizer 1c to produce the liquid residue stream for the second crystallizer. In either feed configuration this slurry is fed via stream 4 to the wash column 1s where the crystals are separated and discharged as pure melted product via stream 2. As mentioned in US Patents 4,787,985 and 5,062,862 the minimum slurry temperature is limited by the operation of the wash column. The liquid residue concentration at this minimum temperature is dependent on the physical properties of the product and in most cases is significantly above the actual eutectic concentration. The temperature and thus the liquid residue concentration can be maintained at a level to provide satisfactory operation of the wash column resulting in pure product. The remaining liquid residue still contains valuable product and is recycled via stream 5 to the recovery step crystallizer 2c except in the previously mentioned case where the feed is mixed with the slurry prior to entering the wash column where the liquid residue would be required from a filter in the first crystallizer instead. Part of the stream 5 may be recycled to 1c to maintain a controlled amount of solid crystals in the slurry stream 4 as necessary. The recovery step crystallizer 2c cools the product significantly colder than in 1c. This forms a slurry stream of pure crystals and remaining liquid residue sufficiently depleted in the product to be recovered. The slurry is fed to another wash column 2s via stream 6 where the solid crystals and a minor portion of the liquid residue are transported to the crystallizer 1c. This thickened slurry typically contains 70-90 wt% crystals and can be transported to 1c by various methods, such as indicated in Fig. 2 and Fig. 3. In the embodiment of Fig. 2, the thickened slurry of separator 2s is for instance reslurried by a slurry recycle stream obtained directly from 1c via duct 11. However, duct 11 is optional and can be replaced by equivalent systems of transport.

Fig. 3 illustrates the possibility to use a portion of the feed to reslurry the crystals from the second separator. This liquid stream is necessary since the separator will produce a crystal stream of 60-85% solids and this must be diluted for transport to the next crystallizer 1c. The same concept is intended when using the filtrate stream from the first separator. No mixing vessel is required since the separator (wash column) is used as the mixer.

The thickened slurry of separator 2s in Fig. 3 can be reslurried by the feed stream 1 via duct 12. A recycle stream from the liquid residue in stream 5 can be fed to separator 2s via duct 13, or even the crystals in stream 7 could be melted and transported as liquid to 1c. Using the feed or a slurry recycle directly from 2c is advantageously chosen as the preferred method for crystal transport, however, the choice to melt the crystals may be required in some cases. The remaining liquid residue is discharged from the process via stream 3. Part of stream 3 may be recycled to 2c to maintain a controlled amount of solid crystals in the slurry stream 6 as necessary. The essential part of this wash column operation is that the crystals do not need to be completely separated as in 1s. The limitations as mentioned in US Patent 5,062,862 to wash column operation do not apply in this mode of operation. The other main difference is that is preferably the major portion of the crystals will be formed in the warmer crystallizer 1c while 2c is utilized mainly as recovery unit. As well known to anyone familiar with crystallization the crystals formed at higher impurity concentrations will generally be significantly smaller than those formed in mixtures with a lower concentration of impurities. The forced transport wash column is particularly well suited to complete this type of separation.

The following example illustrates this process and is compared against the example from US Patent 4,787,985. These figures are not intended to limit the scope of the invention.

#### Example 1

Based on the application of para-xylene as described Example 3 in US Patent 4,787,985 using a feed of 80 wt% para-xylene, a waste stream with a liquid residue concentration of 9.5 wt% para-xylene. Assuming equal crystal production capacity of 900 kg/h in each of four stages the following calculation can be made:

Stage	PX concentration (wt% PX)	Equilibrium Temperature (°C)	Temperature change per stage
I	9.5 wt%	-64 °C	47
II	44 wt%	-17 °C	12
III	62 wt%	-5 °C	5
IV	72 wt%	0 °C	7 (wc)

This can be compared using the same basis and equal crystal production in each stage with the present process as illustrated in Figure 2.

Step	PX concentration (wt% PX)	Equilibrium Temperature (°C)	Temperature change per stage
1	60 wt%	-6 °C	19 (wc)
2	9.5 wt%	-64 °C	58

5 The temperature change between stages is due to the difference in impurity concentration. The effect of the second wash column between step 2 and step 1 can have a significant influence on the change in concentration. This calculation is based on an efficiency of 80%. This value is typical of the results obtained from a wash column operated in this configuration. The porosity, the amount of space not occupied by  
10 crystals, of a packed bed of crystals formed in a forced transport type wash column is typically between 15% and 40%. The separation efficiency of this wash column based only on compression would then be in the range of 85-60% since the space not occupied by crystals would most likely be filled with liquid residue containing impurities. The compressive forces and partial washing provided by the wash column typically provide  
15 efficiencies in the range of 80-90%.

### Example 2

Based on the application of para-dichlorobenzene and using a feed of 95 wt% para-dichlorobenzene, a waste stream with a liquid residue concentration of 30 wt% para-dichlorobenzene. Assuming equal crystal production capacity of 500 kg/h in each of four  
20 stages the following calculation can be made for the four-stage process:

Stage	pDCB concentration (wt%)	Equilibrium Temperature (°C)	Temperature change per stage
I	30 wt%	-1 °C	23
II	52 wt%	22 °C	12
III	67 wt%	34 °C	14
IV	77 wt%	40 °C	13 (wc)



This can be compared using the same basis and producing 75% of the crystals in the first step and the remaining 25% crystal production in second step with the present process as illustrated in Figure 2.

Step	pDCB concentration (wt%)	Equilibrium Temperature (°C)	Temperature change per stage
1	77 wt%	40 °C	13 (wc)
2	30 wt%	-1 °C	41

5

This example illustrates the power of this two-step process in that the concentration of the product fed to the first separator is equal to that of the four-stage process. Thereby significantly reducing the complexity of the process and reducing the investment costs with the same product purity.

10

### Example 3

Using the same conditions as in example 2, the crystal production is shifted where larger portion (90% of the total product) is crystallized in the first step. The temperature of the slurry from the first step is colder than before and therefore the temperature across the wash column is also higher. Controlling the ratio of crystal production between the two stages makes it possible to optimize the wash column performance.

15

Step	pDCB concentration (wt%)	Equilibrium Temperature (°C)	Temperature change per stage
1	66 wt%	33 °C	20 (wc)
2	30 wt%	-1 °C	34

**THIS PAGE BLANK (USPTO)**

What is claimed is:

- 5 1. Apparatus for the purification of a substance from a solution, a suspension or a mixture of liquids by crystallization, preferably in a continuous manner, comprising:
  - 10 a. first crystallizer (1c) comprising an input (1) for receiving a liquid comprising the substance and an output (4) for discharging a slurry of liquid and crystals,
  - b. a first separator (1s) connected to the output 4 of the first crystallizer (1c) having a product output (2), and being with a residue output (5) connected to an input of a second crystallizer (2c),
  - 15 c. a second separator (2s) being with an input connected to an output (6) of the second crystallizer (2c), a crystal output (7) of the second separator (2s) being connected to an input of the first crystallizer (1c).
- 20 2. The apparatus according to claim 1, wherein at least one of the separators (1s, 2s) comprises a wash column.
3. The apparatus according to claim 2, wherein the second separator (2s) comprises a wash column and preferably a piston type wash column.
- 25 4. The apparatus according to any of the preceeding claims including a filter or a settling zone for the crystals in at least one of the crystallizers
5. The apparatus according to any of the preceeding claims wherein the output of the second separator (2s) comprises a heating means (10).
- 30 6. The apparatus according to any of the preceeding claims wherein the crystals separated in the second separator (2s) are being combined with a slurry stream from the first crystallizer before being input into the first crystallizer via duct (11).

7. The apparatus according to any of the preceeding claims where the crystals separated in the second separator (2s) being combined with at least part of the feed (1) via duct (12) before being input into the first crystallizer (1c).
- 5 8. The apparatus according to any of the preceeding claims wherein the crystals separated in the second separator (2s) being combined with at least part of the liquid output (5) via a duct (13) before input into the first crystallizer (1c).
9. A method for the purification of a substance from a solution, a suspension or a  
10 mixture of liquids by crystallization; preferably in a continuous manner, comprising the steps of:
  - a. feeding a liquid comprising the substance to a first crystallizer (1c) and forming crystals in said first crystallizer,
  - b. feeding a slurry comprising crystals from the first crystallizer (1c) to a first  
15 separator (1s), characterized in that
  - c. the crystals are separated from the liquid residue, and more preferably melted and discharged as liquid product,
  - d. a portion of the liquid residue from the separator (1s) is transported to a second crystallizer (2c) and crystals are formed in said second crystallizer  
20 (2c),
  - e. feeding a slurry comprising crystals from the second crystallizer (2c) to a second separator (2s), wherein,
  - f. the crystals are separated removing at least a portion, preferably a major portion of the liquid residue in the second separator (2s) and the crystals are  
25 transported back from the second separator (2s) to the first crystallizer (1c), and
  - g. at least a portion of the liquid residue is discharged.
10. Method according to claim 9 wherein the crystals from the second separator (2s)  
30 are partially melted prior to being transported back to the first crystallizer.

11. Method according to claim 9 or 10, wherein the crystals from the second separator (2s) are mixed with a part of the slurry from the first crystallizer (1c) prior to being transported back to the first crystallizer.
- 5 12. Method according to claim 9, 10 or 11, wherein the crystals from the second separator (2s) are mixed with a part of the feed prior to being transported back to the first crystallizer (1c).
- 10 13. Method according to any of the preceeding, wherein the crystals from the second separator (2s) are mixed with a part of the liquid residue from the first separator (1s) prior to being transported back to the first crystallizer.
- 15 14. Method according to any of claims 9-13, wherein the temperature difference between the slurry from the first crystallizer and the melting point of the pure product is between 2 and 20 °C and preferably between 5 and 15 °C.
- 20 15. Method according to any of claims 9-14, wherein the temperature difference between the slurry from the first crystallizer and the slurry of the second crystallizer is between 25 and 75 °C.
- 25 16. Method according to any of claims 9-15, wherein a portion of the liquid residue from at least one crystallizer is withdrawn via a separate filter unit instead of the separator.
17. Method according to any of the preceeding claims, characterized in that the ratio of the crystal production in the second step relative to the total crystal production is between 5 and 50% and preferably between 10 and 25%.

**THIS PAGE BLANK (USPTO)**

10. 09. 2002

Niro Process  
Technology B.V.

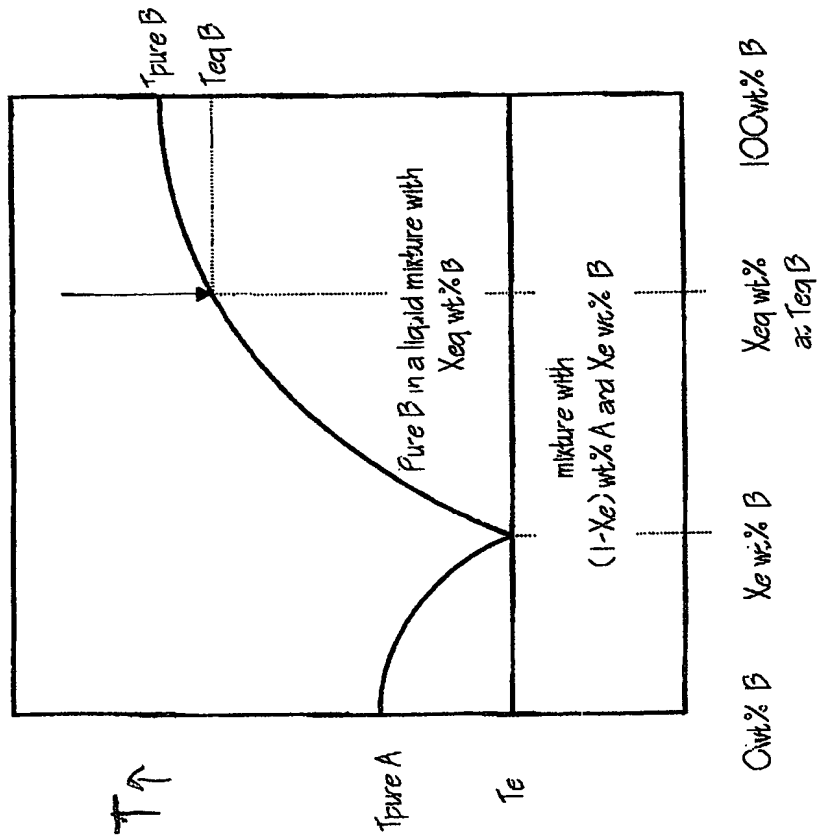


Figure 1.

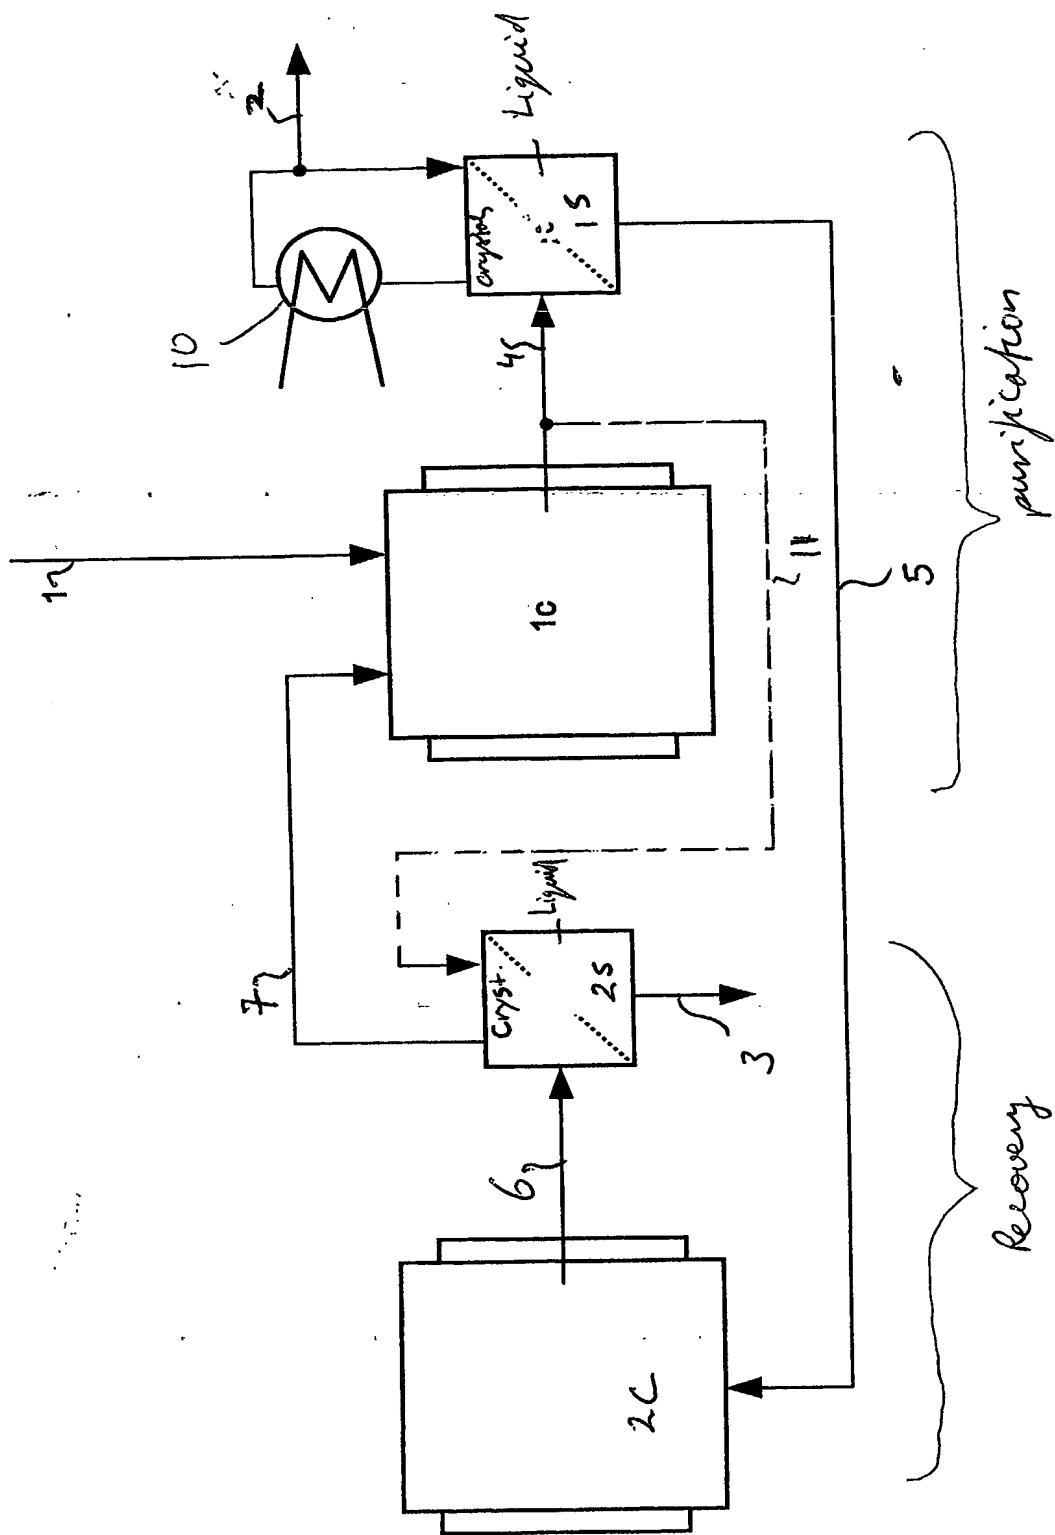


Fig 2



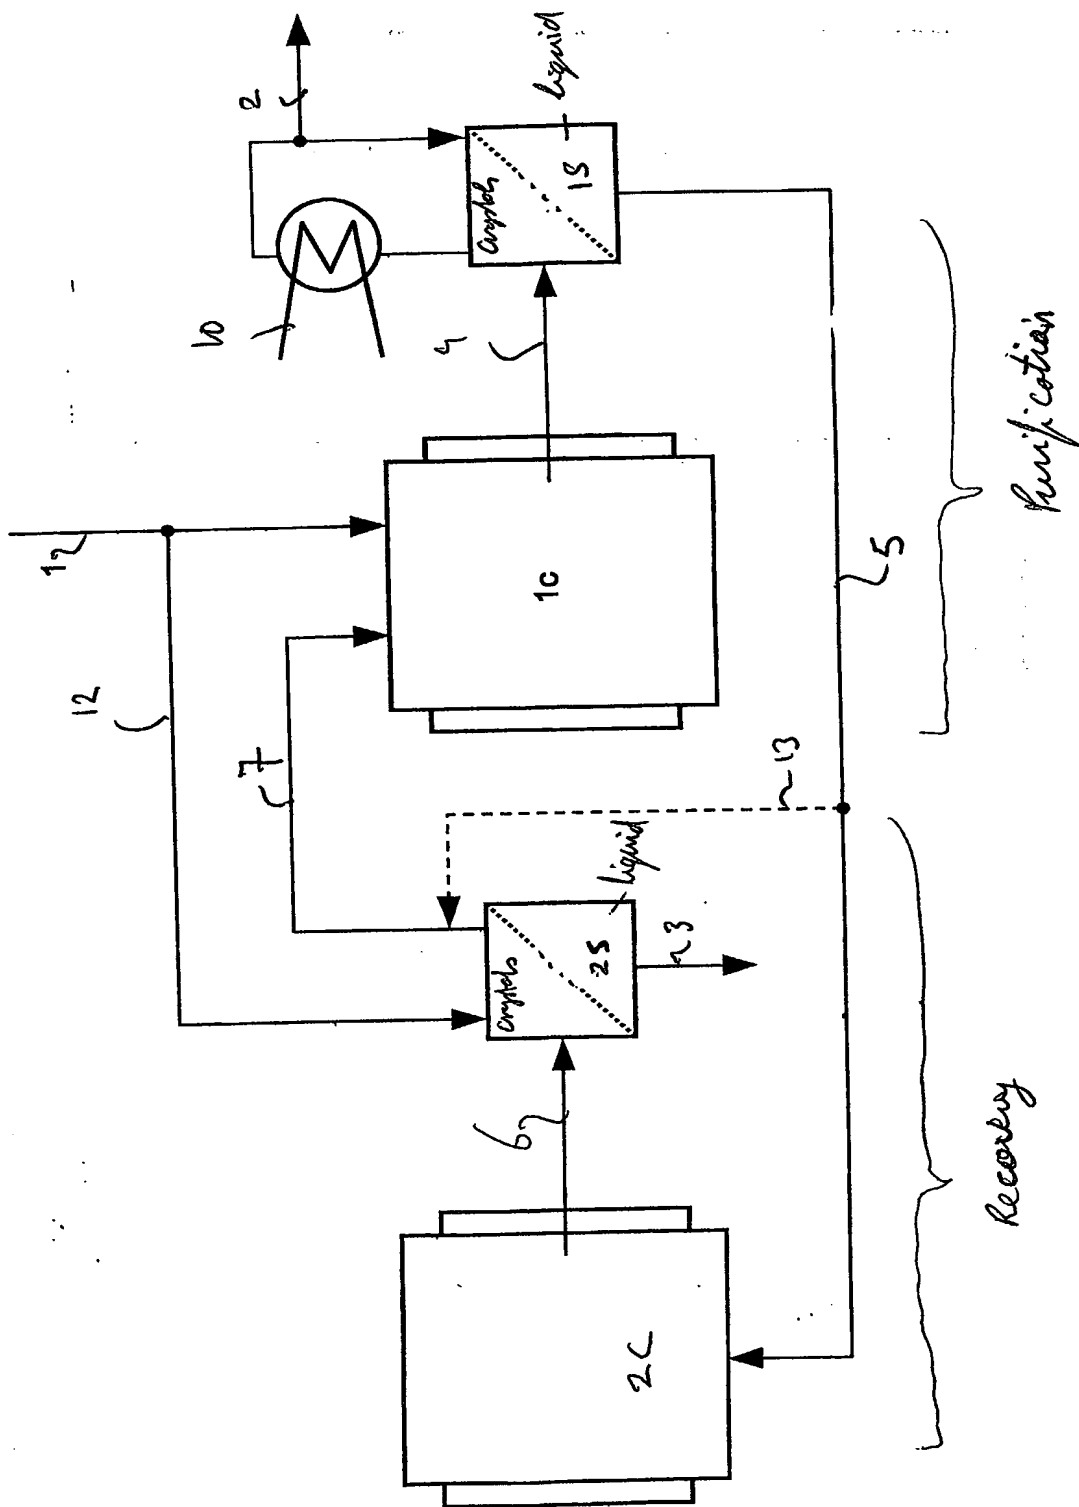


Fig 3

**THIS PAGE BLANK (USPTO)**